

Accessories

Relay



TAR-3
External signaling relay


Features

Allows integration of a doorbell, etc. to intercom. The device will be activated as long as handset is ringing. When the intercom is picked up, the device will no longer be activated.


Used for

IE chime tone
IE-8MD
MK-1GD
MK-2MCD
KC, KB series
AT-406
TB-SE(TC-M)

Unit dimensions

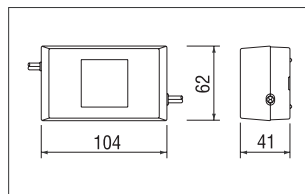

Wiring

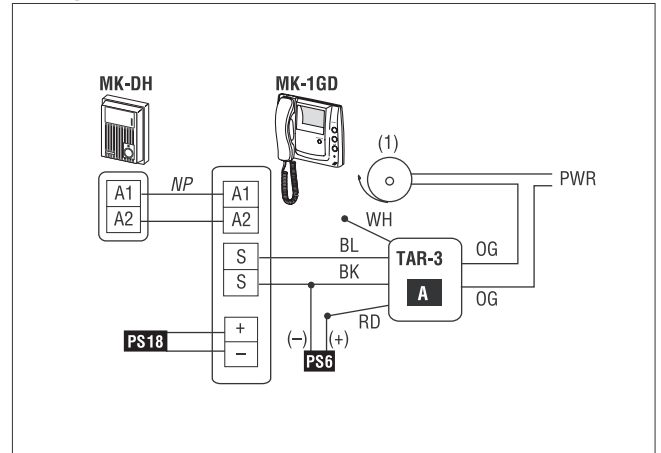

(1) Bell, etc. PWR : Power source
WH : White BL : Blue BK : Black(-) RD : Red(+) OG : Orange
PS6 : PS-0603DIN

Specifications (TAR-3)

Power source	6V DC, supplied by PS-0603DIN
Contact rating	0.3A, 240V AC. 1.0A, 24V DC.
	Doorbell or buzzer must be AC operated or DC mechanical type only.

Auxiliary light power control



MAW-B
Auxiliary light control relay

Features


MAW-B relay is used for turning on an auxiliary light to spotlight a caller at the entrance.

The light is illuminated when the residential call button is pressed, and during visual monitoring mode.


Used for

KB-3MRD, GF-BC(GF)

Unit dimensions

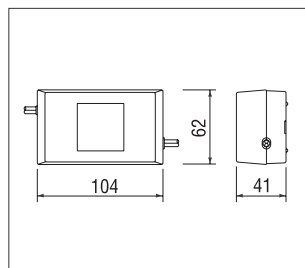

Wiring

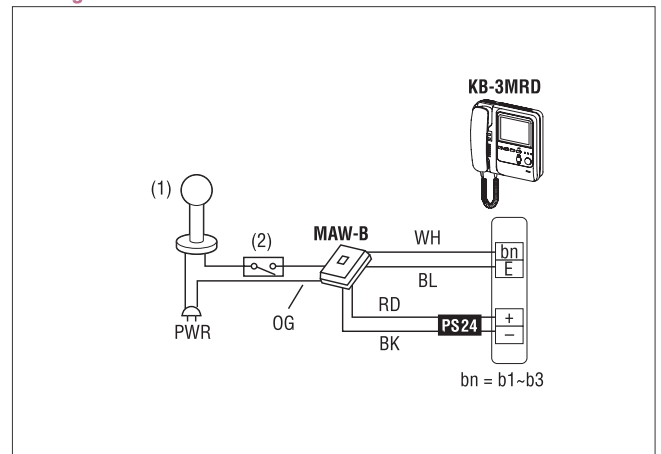

(1) Porch light, etc. (2) Local switch
WH : White BL : Blue RD : Red(+) BK : Black(-) OG : Orange(2)

Specifications (MAW-B)

Power source	24V DC.
Power supply	PS-2420DIN, PS-2420S of system.
Power consumption	2.5W max. 0.5W standby.
Relay contact rating	Dry closure contact for incandescent light for general lighting of less than 100W.