


Accessories

Call extension

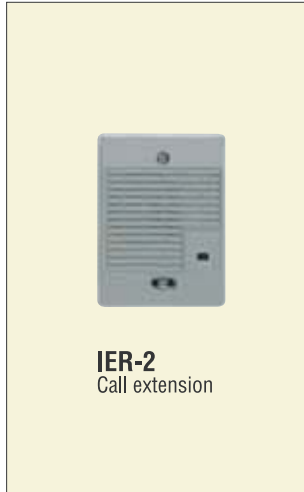


Features

- Announces (chime) call tone only, adjustable
- Indoor mounting


Used for

IE series, MK-1GD, MK-2MCD
KC-1MRD, KC-1GRD, KB-3MRD
NEM-n, NEM-nA, TC-M
JB-2MD, JB-2MED, JA-2MECD, JA-2MCD

Unit dimensions

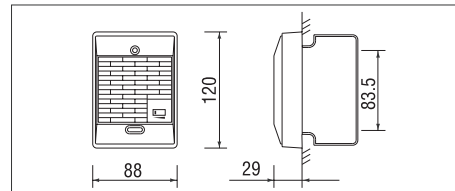

Wiring

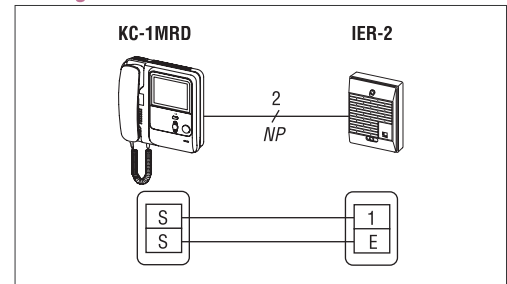

Door release



Features


- Door release activation, momentary or talk line-controlled

Used for

Single-family unit
DA-1DS/G, C-123L/A
IE-1AD(U), IE-1GD(U)
IE-2AD(U), IE-8MD(2)
TD-H/B (via DE-UR)
LEM-1DL
LEF, LEF-C (via RY-PA)
MYW-P3CB(3)
MYW-P3L(3) (via RY-PA)
MK series
JA-2MECD, JA-2MCD
JB-2MD, JB-2MED
KC-1MRD, KC-1GRD
KB-3MRD

Multi-family unit
DA-2DS/G, DA-4DS/G
GF (5)
VC-M (via RY-PA)

Wiring

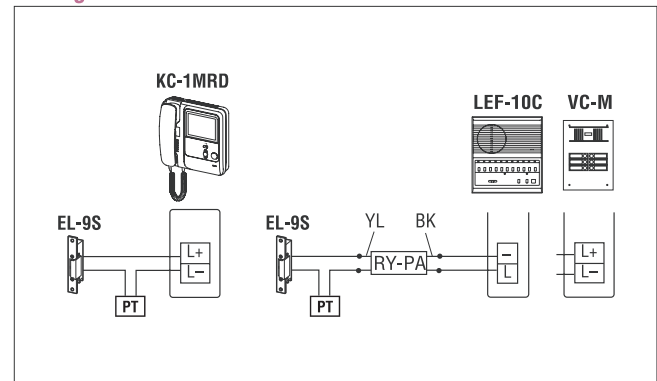

BK : Black(2) YL : Yellow(2)

Specifications (EL-9S)

Power source 12V AC, 0.35A, powered by AC trans.

Specifications (RY-PA)

Power source 12V DC.
Relay contact rating 110V AC, 1A.
24V DC, 1A.

Relay




Features

Intercom station can be signaled by external device via RY-AC/A relay. External device will be activated momentarily as long as the call signal on the intercom is activated.


Used for

TD-H/B, TD-Z/A
IE-Series
IE-8MD, LEF

Unit dimensions

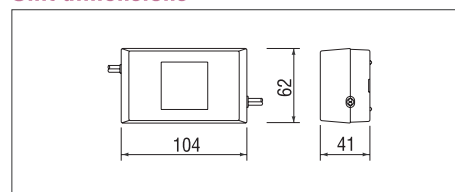

Wiring

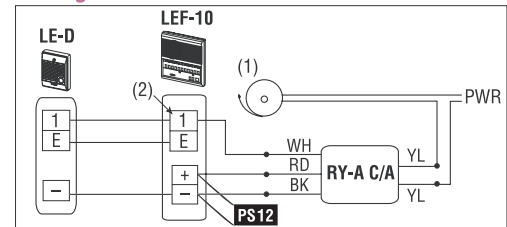

(1) External signaling device, bell, etc. (2) Call receive terminal WH : White RD : Red(+) BK : Black(-) YL : Yellow
PWR : Power source

Specifications (RY-AC/A)

Power source 12V DC, supplied by power supply of system or trunk line.
Contact rating 0.3A, 240V AC. 1.0A, 24V DC.
Bell, buzzer, etc. must be AC operated or DC mechanical type only.