

Audio Door Stations

IE/IF Series

Surface mount station



IF-DA
Door station



IE-DC
Door station

Flush mount station




IE-JA
Door station



IE-FY
Door station

Unit dimensions

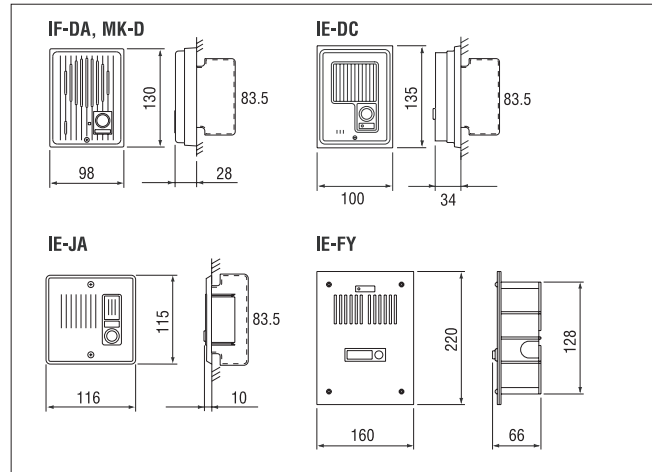

Specifications

Wiring	2 parallel wires to master, non-polarized
Wiring distance	150m(0.65mmø) 230m(0.8mmø) 360m(1.0mmø)

Features

- Weather resistant audio door stations
- Hands free communication
- Call button rings chime or tone at inside station

Used for

IE-1AD(U), IE-1GD(U),
IE-2AD(U), IE-8MD,
TD-nH/B w/DE-UR
(n=3, 6, 12 & 24)
TC-M w/TB-AD1
TC-M w/TB-AD10

Some applications

- At multiple doors w/TB-ADM10 in place of video door

IE-DL Series

Surface mount station



IE-DL1
1-call surface-mount door station




IE-DL2
2-call surface-mount door station



IE-DL3
3-call surface-mount door station

Unit dimensions

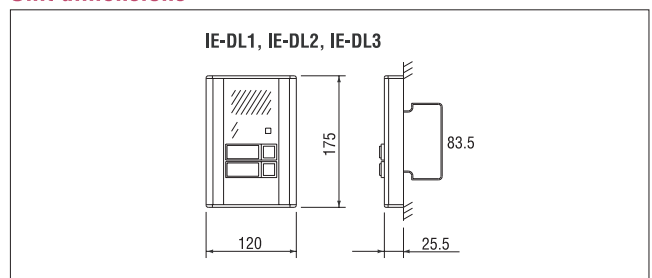

Specifications

Power source	12~16V AC, 140mA or 12~24V DC, 140mA.
Communication	Press CALL to ring a flat station. Talk handsfree after the inside station replies.
Wiring	4 to 8 wires, polarized.
Wiring distance	150m(0.65mmø) 230m(0.8mmø) 360m(1.0mmø)

Features

- 1~3-call surface-mount door station with aluminum panel.
- Directory back illumination.
- AC/DC power source.

Used for

IE-1AD(U), IE-1GD(U),
IE-2AD(U), IE-2A2D(U),
IE-8MD, TD-nH/B w/DE-UR
(n=3, 6, 12 & 24)