









High-Power Intercom




MASTER 2 SUB 10 AP-M/A

Master station	Sub station	Call button	Lineup
 <p>AP-5M/A 5-call master AP-10M/A 10-call master (Photo)</p>	 <p>AS-3N Sub station</p>	 <p>NP-B Flush call plate</p>	<p>NP-W Surface mount box for NP-B</p>  <p>NBZ-M Flush square frame for AS-3N</p>  <p>N-EA Surface round frame for AS-3N</p> 
 <p>AP-1M/A 1-call master</p>	 <p>AS-3A Sub station</p>		

Features


- 10 watt-powered paging & communication system
- Selective all call to 5 subs
- Single or dual-master configuration
- 8Ω or 16Ω horn speaker with talkback

Communication network

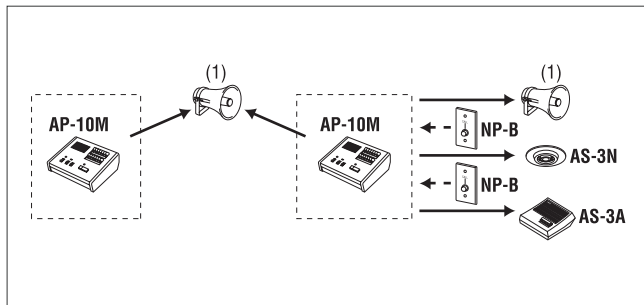


(1) 8Ω horn

Unit dimensions

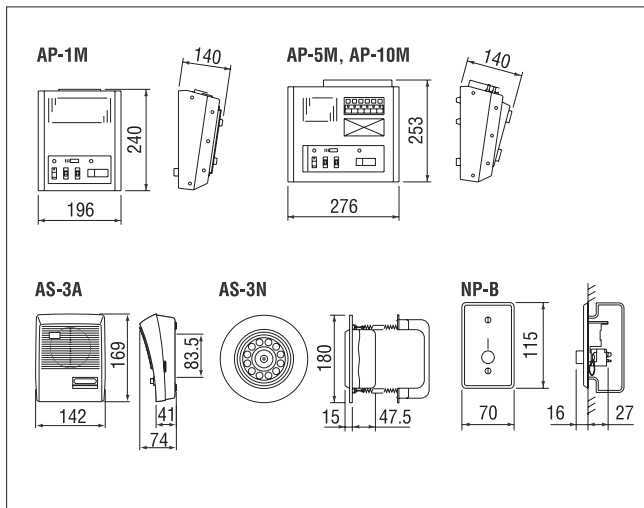

Wiring

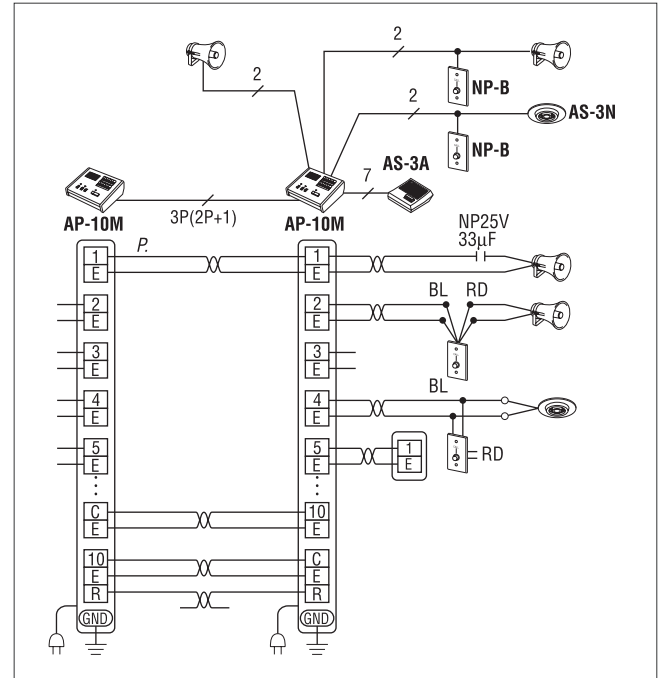

BL : Blue(2). RD : Red(2).

Specifications (AP-M)

Power source	220~240V AC, 50/60Hz.
Consumption	45W. 6W standby.
Communication	Sub calls in with tone & LED, 15 sec. Depress selector and use Talk/Listen switch. All call selectively to max. 5 subs. Max. 10W transmit, adjustable. 300mW receive, adjustable.
Wiring	1 twisted pair per sub, non-polarized 3 pairs (5), masters.
Distance	AP-M to sub 150m(0.65mmø) 230m(0.8mmø)