






Master / Sub Intercom

DOOR 10 ROOM 1 TC-M & TB-AD10




<p>Door station</p>  <p>IF-DA Door station → P.33</p>	<p>Master station</p>  <p>TC-10M 10-call master</p>	<p>Door adaptor</p>  <p>TB-AD1 1-call door adaptor</p>	<p>Lineup</p>  <p>IER-2 Call extension → P.97</p>  <p>TAR-3 External signaling relay → P.98</p>
<p>TB-AD10 10-call door adaptor</p>			
<p>Power supply PS-1820DIN → P.100</p>			

Features


- Single or multiple audio door communication, expandable
- Optional selective door release control

Communication network

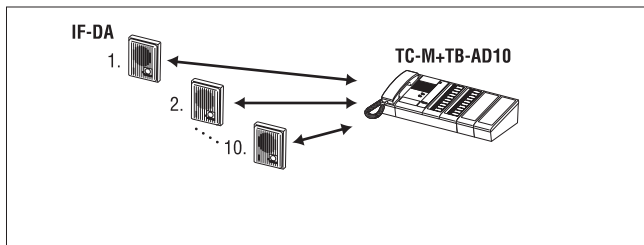


Pre-tone sounding or mute selectable at TB-AD10.


Unit dimensions

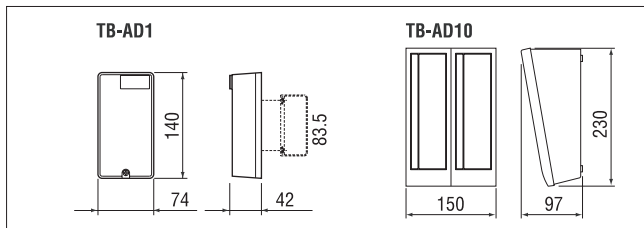

Wiring

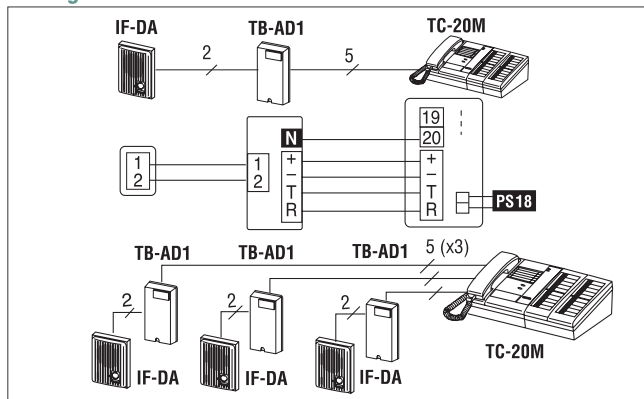

Wiring

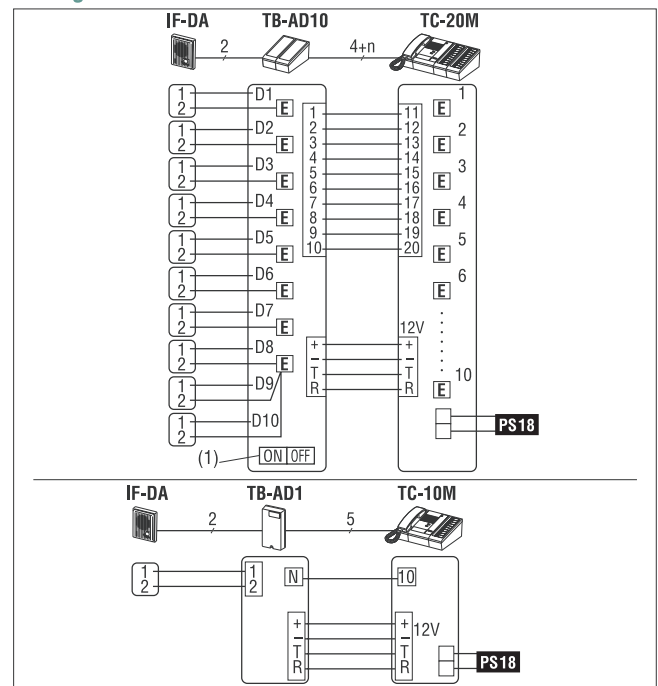

The second selector switch bank is applied for ten IF-DA's.

PS18 : PS-1810DIN (1) Pretone sounding

Specifications (TB-AD10)

Power source	TB-AD10: 12V DC, supplied by TC-M.
Door capacity	10(TB-AD10), 1(TB-AD1).
Communication	Door calls in w/tremolo & LED 40 sec. Pick up and depress LED lit selector. Pretone sounds at door, or silenced.
Wiring	2 parallel wires to door, non-polarized. 4 common + no. doors, TC-M to adaptor.
Distance	TC-M to TB-AD10 65m(0.65mmø) 150m(1.0mmø) TB-AD10 to IF-DA 150m(0.65mmø) 360m(1.0mmø)